

> **Features**

- Compact design for ruggedized environmental applications
- Low axial ratio for optimum performance
- Read range\*: up to 18 m (\* depending on tag properties, environment and requirements)
- Ideal solution for portal applications
- Different far field half-power beam widths in azimuth and elevation plane
- Suitable for bulk and single tag applications
- High IP67 degree of protection, suitable for outdoor use



> **General specifications**





Order No.		52010086	52010087
Type		WIRA-30-circular-ETSI	WIRA-30-circular-FCC
Frequency range	[MHz]	865-868 (865-867 for India)	902-928
©KRAI			-
Polarization		circular	circular
Antenna gain	[dBiC]	typ. 11.5	typ. 11
Axial ratio	[dB]		< 2
VSWR		typ. 1.2:1	< 1.3:1
Front-to-back ratio	[dB]		> 20
Impedance antennaport	[Ohm]		50
Max. radiated power	[dBm]	+33 e.r.p. (ETSI EN 302 208)	+36 EIRP (FCC15.247)
Far field half-power beam width (if mounted like picture)	[°]		30 vertical 70 horizontal
Connection			N female
Weight	[kg]		3.7
Degree of protection			IP67
Operating temperature range	[°C]		-40 to +70
Storage temperature range	[°C]		-40 to +85
Dimensions (L x W x H) (without brackets)	[mm]		557 x 270 x 58.5
Packing size (L x W x H)	[mm]		762 x 356 x 203
<b>Material</b>			
Antenna cover		fibreglass radome, UV resistance, gray	
Chassis		stainless steel	
Patch plate		brass tin-plated	
Antenna support		aluminium	
Seals		thermoplastic elastomer	

> **Remarks**

**Accessories optional**

- All accessories can be found at: <https://http://www.kathrein-solutions.com/products/hardware/accessories>

➤ **Dimensions [mm]**

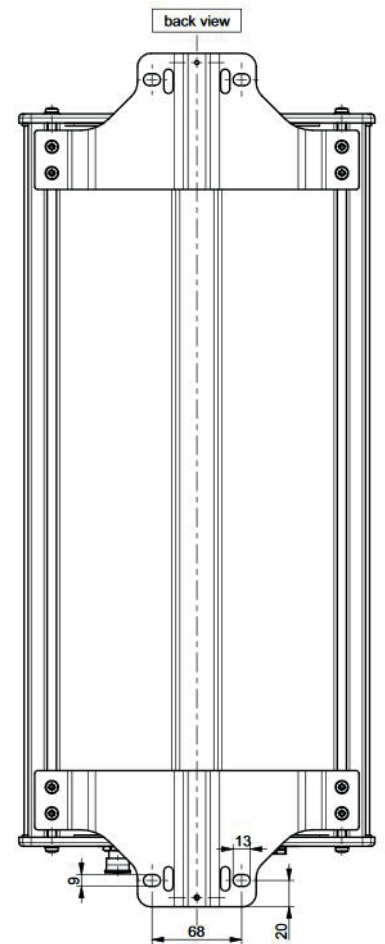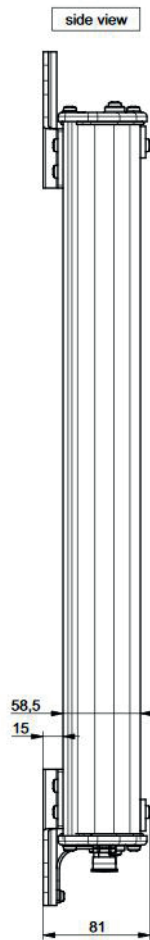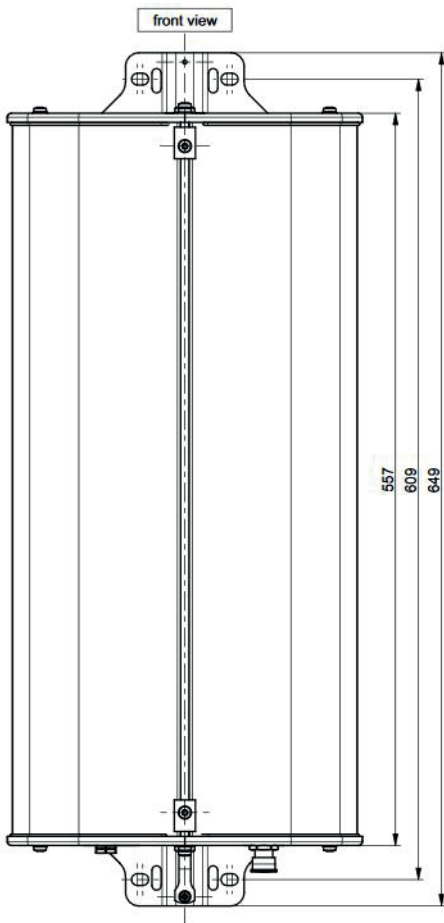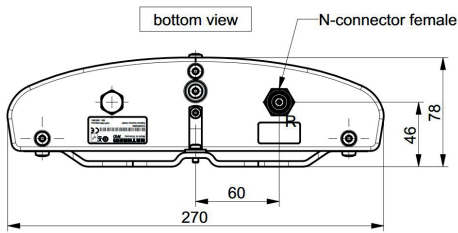

**> Features**

- Compact design for ruggedized environmental applications
- Read range\*: up to 18 m (\* depending on tag properties, environment and requirements)
- Ideal solution for toll collect applications
- Different far field half-power beam widths in azimuth and elevation plane
- Suitable for bulk and single tag applications
- High IP65 degree of protection, suitable for outdoor use



**> General Specifications**

Order No.		52010248	52010249
Type		WIRA-30-linear-ETSI	WIRA-30-linear-FCC
Frequency range	[MHz]	865-868	902-928
©KRAI			-
Polarization			linear
Antenna gain	[dBi]		typ. 11
VSWR		typ. 1.3:1	typ. 1.3:1
Front-to-back ratio	[dB]		> 20
Impedance antennaport	[Ohm]		50
Max. radiated power	[dBm]	+33 e.r.p. (ETSI EN 302 208)	+36 EIRP (FCC15.247)
Far field half-power beam width (if mounted like picture)	[°]		30 vertical 70 horizontal
Connection			N female
Weight	[kg]		3.7
Degree of protection			IP67
Operating temperature range	[°C]		-40 to +70
Storage temperature range	[°C]		-40 to +85
Dimensions (L x W x H) (without brackets)	[mm]		557 x 270 x 58.5
Packing size (L x W x H)	[mm]		762 x 356 x 203
<b>Material</b>			
Antenna cover			fibreglass radome, UV resistance, gray
Chassis			stainless steel
Patch plate			brass tin-plated
Antenna support			aluminium
Seals			thermoplastic elastomer

**> Remarks**

**Notes**

- The antenna can be operated only in conjunction with a ©KRAI Reader

**Accessories optional**

- All accessories can be found at: <https://http://www.kathrein-solutions.com/products/hardware/accessories>

➤ **Dimensions [mm]**

